


to IEC 60309-2, EN IEC 60309-2, DIN EN IEC 60309-2 (VDE 0623-2). Other voltages and frequencies available on request.

PRODUCT INFORMATION

			A	P	110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V 300-500 Hz		
					3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p
					4 h	4 h	4 h	6 h	9 h	9 h	9 h	6 h	6 h	7 h	7 h	7 h	10 h	10 h	10 h	2 h	2 h	2 h
	**Plug PowerTOP Xtra S with SafeCONTACT** screwless, with insulation displacement technology, ergonomic enclosure design with nubbed grip zones, rubberised cable gland with sealing, strain relief and protection against kinking IP54 Std. Pack: 10		16	3				13521														
			16	5							13522											
			32	5							13523											
	**Plug PowerTOP Xtra with ErgoCONTACT** screw connection technology ErgoCONTACT, ergonomic enclosure design with nubbed grip zones, rubberised cable gland with sealing, strain relief and protection against kinking IP54 Std. Pack: 10		16	3	13501*			13502			13503*											
			16	4	13504*			13505*			13506			13507*			13508*					
			16	5				13509			13510			13511								
			32	3	13512*			13513			13514*											
			32	4				13515*			13516			13517*			13518*					
			32	5				13519			13520											
			* Available from 01.06.2024																			
	**Plug PowerTOP Xtra R with ErgoCONTACT** screw connection technology ErgoCONTACT, highly heat resistant contact carrier, nickel plated contacts, ergonomic enclosure design with nubbed grip zones, rubberised cable gland with sealing IP54 Std. Pack: 10		16	3	13550*			13551*			13552*			13553*			13554*			13555*		
			16	4	13556*			13557*			13558*			13559*						13560*		
			16	5	13561			13562			13563			13564			13565			13567		
			32	3	13572*			13573*			13574*						13575*			13576*		
			32	4	13577*			13578*			13579*			13580*						13581*		
			32	5	13582			13583			13584			13585			13586			13587		
			* Available from 01.06.2024																			


to IEC 60309-2, EN IEC 60309-2, DIN EN IEC 60309-2 (VDE 0623-2). Other voltages and frequencies available on request.


PRODUCT INFORMATION

NEW



Plug PowerTOP Xtra
with ErgoCONTACT
screw connection technology
ErgoCONTACT, ergonomic enclosure design with nubbed grip zones, rubberised bayonet ring, sealed against dust, temporary submersion and high-pressure cleaning
IP67 / IP69
Std. Pack: 10






A	P	110 V 50 a. 60 Hz	230 V 50 a. 60 Hz	400 V 50 a. 60 Hz	500 V 50 a. 60 Hz	>50 - 500 V 100-300 Hz	>50 - 500 V 300-500 Hz
		3 p 4 h	4 p 4 h	5 p 4 h	3 p 6 h	4 p 9 h	5 p 9 h	3 p 9 h	4 p 6 h	5 p 6 h	3 p 7 h	4 p 7 h	5 p 7 h	3 p 10 h	4 p 10 h	5 p 10 h	3 p 2 h	4 p 2 h	5 p 2 h
16	3	13619*			13620*														
16	4				13621**			13622**			13623**								
16	5							13624*											
32	3				13625**														
32	4				13626**			13627**			13628**								
32	5							13629*											


* Available from 01.08.2024 ** Available from 01.11.2024

NEW



Plug PowerTOP Xtra R
with ErgoCONTACT
screw connection technology
ErgoCONTACT, ergonomic enclosure design with nubbed grip zones, highly heat resistant contact carrier, nickel plated contacts, rubberised bayonet ring, sealed against dust, temporary submersion and high-pressure cleaning
IP67 / IP69 - Std. Pack: 10






A	P	110 V 50 a. 60 Hz	230 V 50 a. 60 Hz	400 V 50 a. 60 Hz	500 V 50 a. 60 Hz	>50 - 500 V 100-300 Hz	>50 - 500 V 300-500 Hz
16	3	13630*	13631*	13632*	13633*	13634*	
16	4	13635**	13636**	13637**	13638**	13639**	13640**
16	5	13641*	13642*	13643*	13644*	13645*	
32	3	13649**	13650**	13651**			
32	4	13652**	13653**	13654**	13655**	13656**	13657**
32	5	13658*	13659*	13660*	13661*		


* Available from 01.08.2024 ** Available from 01.11.2024



Plug PowerTOP Xtra
rubberised grip area, highly heat resistant contact carrier, frame terminals, nickel plated contacts, cable gland and sealing, strain relief and protection against kinking, enclosure with thread lock, two safety slides

IP54
Std. Pack: 5





A	P	110 V 50 a. 60 Hz	230 V 50 a. 60 Hz	400 V 50 a. 60 Hz	500 V 50 a. 60 Hz	>50 - 500 V 100-300 Hz	>50 - 500 V 300-500 Hz
63	3	13101	13102				
63	4		13105	13106	13107		
63	5		13111	13112			


to IEC 60309-2, EN IEC 60309-2, DIN EN IEC 60309-2 (VDE 0623-2). Other voltages and frequencies available on request.


PRODUCT INFORMATION



Plug PowerTOP Xtra
rubberised grip area, highly heat resistant contact carrier, frame terminals, nickel plated contacts, cable gland and sealing, strain relief and protection against kinking, thread lock, two safety slides

IP67
Std. Pack: 5








A	P	110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V 300-500 Hz		
		3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p
		4 h	4 h	4 h	6 h	9 h	9 h	9 h	6 h	6 h	7 h	7 h	7 h	10 h	10 h	10 h	2 h	2 h	2 h
63	3	13201			13202			13203											
63	4	13204			13205			13206			13207			13208			13209		
63	5	13210			13211			13212			13213						13214		
125	3	13215			13216														
125	4	13217			13218			13219			13220								
125	5	13223			13224			13225			13226						13227		


to IEC 60309-2, EN IEC 60309-2, DIN EN IEC 60309-2 (VDE 0623-2). Other voltages and frequencies available on request.

PRODUCT INFORMATION

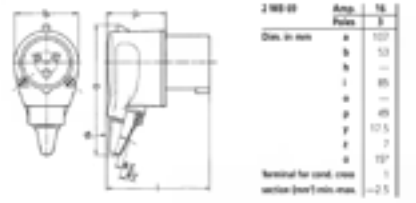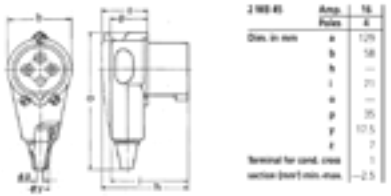			A	P	110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V 300-500 Hz		
					3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p
					4 h	4 h	4 h	6 h	9 h	9 h	9 h	6 h	6 h	7 h	7 h	7 h	10 h	10 h	10 h	2 h	2 h	2 h
	**Angled plug VarioTOP** nickel plated contacts, with grommet, cable entry hood rotating up to 60° to the left or the right 3980: in colour code 3983 and 3982: in light grey IP44 Std. Pack: 10		16	5							3980											
			16	5				3983			3982											
	**Angled plug** with grommet, nickel plated contacts IP44 Std. Pack: 10		16	3	1410			1411														
	**Angled plug** with grommet, nickel plated contacts IP44 Std. Pack:10		16	4				891			315											

to IEC 60309-2, EN IEC 60309-2, DIN EN IEC 60309-2 (VDE 0623-2). Other voltages and frequencies available on request.

PRODUCT INFORMATION

			A	P	110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V 300-500 Hz		
					3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p	3 p	4 p	5 p
					4 h	4 h	4 h	6 h	9 h	9 h	9 h	6 h	6 h	7 h	7 h	7 h	10 h	10 h	10 h	2 h	2 h	2 h
	**Angled plug** with grommet, nickel plated contacts IP44 Std. Pack: 10		32	3				3306														
			32	4				3646			3987											
			32	5				3424			3266											